


Home Network
COMMAX.in.ua

www.commax.in.ua

Entrance Camera

Model No. DRC-4BG/4CG

Use And Care Guide

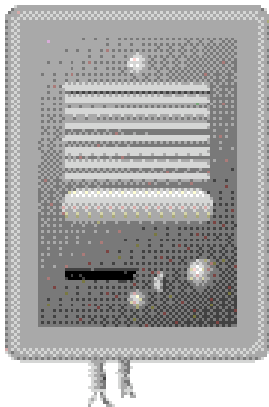

COMMAX Co.,Ltd.

Table of Contents


1. Greeting	2
2. Overview	3
3. Wiring and Installation	4
4. Specification	7

1. Greetings

*** Thank you for purchasing a CO MMAX product.**

*** Please read this manual before use and properly follow its instructions.**


2. Overview

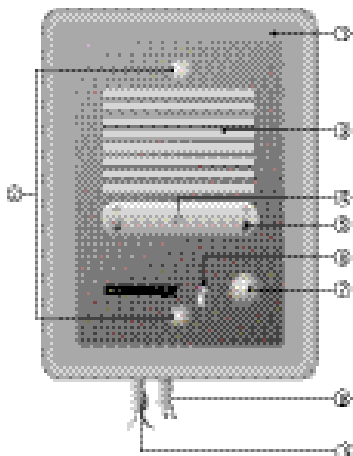


No.	Name	contents
1	Front Panel	
2	Mounting Holes	
3	Speaker	Transmits sounds from the household.
4	Camera Lens	Protect it from foreign substances.
5	LED Lamp	Turns on at night for better viewing.
6	MIC	For use when communicating with the household.
7	Page Button	Used to page the household.
8	Door Release Cable	
9	Monitor Cable	Connect to the household monitor, after matching up the polarity

3. Wiring and Installation



1. Cut out the mounting template included in the manual and use it to drill mounting holes (p. 6.5) on the wall. Insert Concrete anchors in the holes.
2. Wire the household monitor cable as shown below, with matched polarity. [FIG-2]
(#1:RED/VOICE, #2:BLUE/GND, #3:YELLOW/DC 12V, #4:BLACK/VIDEO)
3. Connect the door release cable as shown below. [FIG-2]
4. For exposed wiring, organize the wiring through the case as shown below. [FIG-3]
5. Secure using bolts and Cover with A.L. Screw Covers. [FIG-4]



[FIG-2]



[FIG-3]



[FIG-4]


[MOUNTING TEMPLATE]

2- ϕ 8.5


83.5

120

87.5

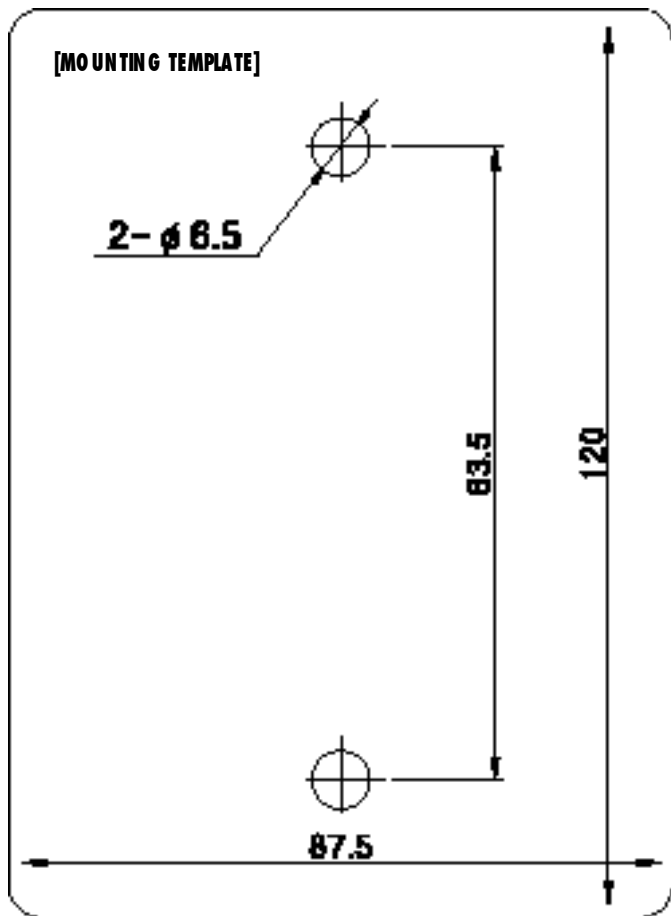

< In case of taking the cover off >

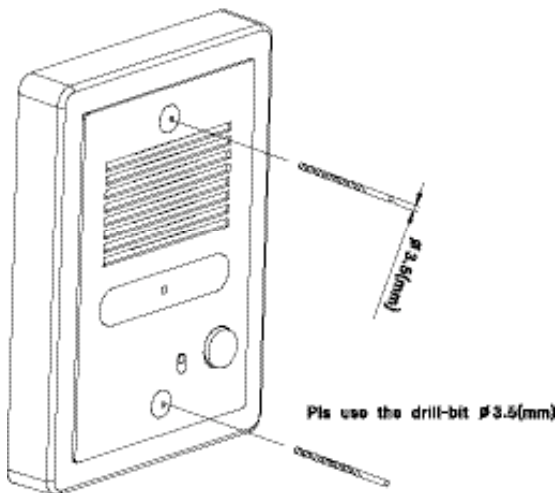

4. Specification

Specification	Model	DRC-4BG /4CG
Resolution		270,000 pixel C C D
Rated Voltage		DC 12V (supplied from the monitor)
Wiring Method (household)		4-wire polarity
Effective Viewing Angle		Horizontal 55°, Vertical 40°
Angle Adjustment		Fixed
Broadcast Method		NTSC STANDARD
Horizontal/Vertical Scanning Frequency		15.734KHz / 60Hz, 15.625KHz / 50Hz
Lamp		DRC-4BG : Enclosed infrared LED DRC-4CG : Enclosed white LED (night operation)
Minimum Luminance		0.1 LUX (Up to 30cm in front of the camera)
Ambient Temperature		-10 °C ~ +50°C
External Dimensions (mm)		93.5(W) x 126(H) x 18(D)
Weight (g)		180

Home Network
COMMAX[®]

COMMAX Co.,Ltd.

513-11, Sangdaewon-dong, Jungwon-gu,

Seongnam-si, Gyeonggi-do, Korea

Int'l Business Dept :

Tel.; +82-31-7393-540 ~ 550

Fax.; +82-31-745-2133

Web site : www.commax.com